


# CILINDROS DE CURVAR CHAPA HIDRÁULICOS

## 3 rodillos piramidales MCH3RP

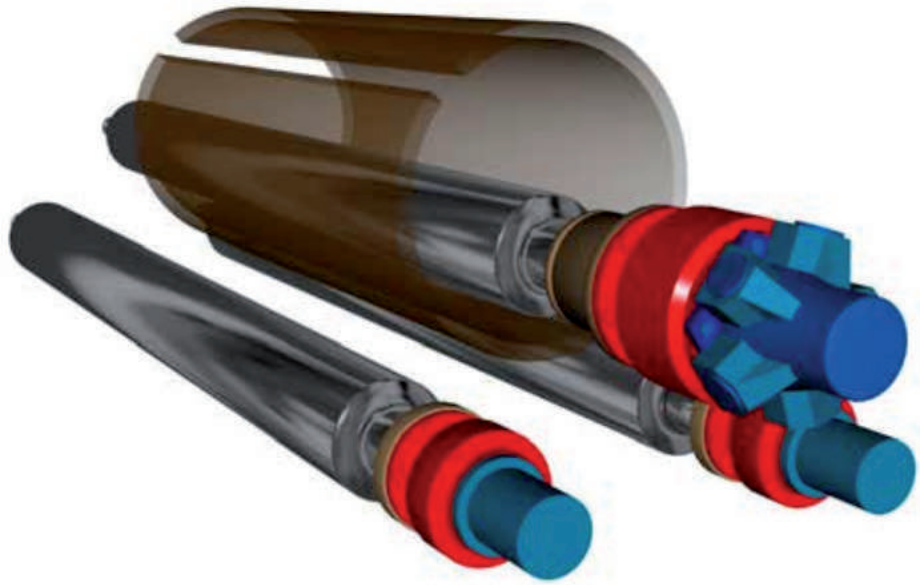

# ESPECIFICACIONES TÉCNICAS

	Useful Width (mm)	Thickness Capacities 5 x ø Top Roll Bending   Prebending (mm)	Thickness Capacities 3 x ø Top Roll Bending   Prebending (mm)	Thickness Capacities 1,2 x ø Top Roll Bending   Prebending (mm)	ø Top Roll (mm)	ø Side Rolls (mm)	Power (kW)	Weight (Kg)	Dimensions LxWxH (mm)
<b>MCH 3RP 20-150</b>	2050	8   6	7   5	6   4	150	150	7	2.880	4.000x1.130x1.130
<b>MCH 3RP 20-180</b>	2050	10   8	9   7	8   6	180	180	8,5	3.520	4.000x1.250x1.230
<b>MCH 3RP 20-200</b>	2050	12   10	11   9	10   8	200	200	9,5	3.700	4.000x1.300x1.300
<b>MCH 3RP 20-230</b>	2050	14   12	13   11	12   10	230	230	11,5	5.500	4.000x1.450x1.320
<b>MCH 3RP 20-260</b>	2050	20   16	18   14	16   12	260	260	18,5	6.900	4.380x1.530x1.375
<b>MCH 3RP 20-320</b>	2050	25   20	22   18	20   16	320	320	22,5	9.500	4.380x1.700x1.490
<b>MCH 3RP 20-350</b>	2050	30   26	28   24	26   20	350	350	27,7	13.000	4.450x2.015x1.700
<b>MCH 3RP 20-400</b>	2050	35   30	32   28	30   26	400	400	27,7	15.050	4.450x2.125x1.800
<b>MCH 3RP 20-440</b>	2050	45   38	41   36	38   32	440	440	31,2	17.840	4.450x2.185x1.860

# ESPECIFICACIONES TÉCNICAS

	Useful Width (mm)	Thickness Capacities 5 x ø Top Roll Bending   Prebending (mm)	Thickness Capacities 3 x ø Top Roll Bending   Prebending (mm)	Thickness Capacities 1,2 x ø Top Roll Bending   Prebending (mm)	ø Top Roll (mm)	ø Side Rolls (mm)	Power (kW)	Weight (Kg)	Dimensions LxWxH (mm)
<b>MCH 3RP 25-180</b>	2550	8   6	7   5	6   4	180	180	8,5	3.810	4.500x1.250x1.230
<b>MCH 3RP 25-200</b>	2550	10   8	9   7	8   6	200	200	9,5	4.100	4.500x1.300x1.300
<b>MCH 3RP 25-230</b>	2550	12   10	11   9	10   8	230	230	11,5	6.000	4.500x1.350x1.320
<b>MCH 3RP 25-260</b>	2550	14   12	13   11	12   10	260	260	14,7	7.550	4.880x1.530x1.375
<b>MCH 3RP 25-320</b>	2550	20   16	18   14	16   12	320	320	22,5	10.500	4.880x1.700x1.490
<b>MCH 3RP 25-350</b>	2550	25   20	22   18	20   16	350	350	27,7	14.000	4.950x2.015x1.700
<b>MCH 3RP 25-400</b>	2550	30   26	28   24	26   20	400	400	27,7	16.600	4.950x2.125x1.800
<b>MCH 3RP 25-440</b>	2550	35   30	32   28	30   26	440	440	31,2	19.800	4.950x2.185x1.860

# ESPECIFICACIONES TÉCNICAS

	Useful Width (mm)	Thickness Capacities		Thickness Capacities		ø Top Roll (mm)	ø Side Rolls (mm)	Power (kW)	Weight (Kg)	Dimensions LxWxH (mm)
		5 x ø Top Roll Bending   Prebending (mm)	3 x ø Top Roll Bending   Prebending (mm)	1,2 x ø Top Roll Bending   Prebending (mm)						
<b>MCH 3RP 30-200</b>	3100	8   6	7   5	6   4	200	200	8,5	5.800	5.000x1.300x1.300	
<b>MCH 3RP 30-230</b>	3100	10   8	9   7	8   6	230	230	9,5	7.000	5.000x1.350x1.320	
<b>MCH 3RP 30-260</b>	3100	12   10	11   9	10   8	260	260	11,5	8.250	5.380x1.530x1.375	
<b>MCH 3RP 30-320</b>	3100	14   12	13   11	12   10	320	320	18,5	11.000	5.380x1.530x1.375	
<b>MCH 3RP 30-350</b>	3100	20   16	18   14	16   12	350	350	22,5	15.000	5.450x2.015x1.700	
<b>MCH 3RP 30-400</b>	3100	25   20	22   18	20   16	400	400	27,7	18.000	5.450x2.125x1.800	
<b>MCH 3RP 30-440</b>	3100	30   26	28   24	26   20	440	440	31,2	21.000	5.450x2.185x1.860	